


# POLO 220



0,8 - 1KG 

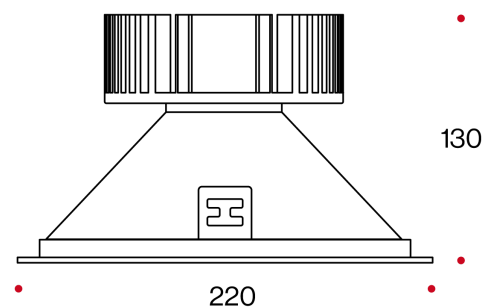

POWER SUPPLY  
220/240V-50/60Hz

Faro ad incasso professionale, anello telaio faro in pressofusione di alluminio verniciato.

Riflettore in alluminio brillantato con puro alluminio 99,9%. Dissipatore di calore in alluminio anodizzato o verniciato nero.

Disponibile sia con l'innovativo LED IOB, che con LED COB. La versione con LED COB viene proposta con resa cromatica CRI 85 anche in versione dimmerabile e fornita completa di alimentatore separato.

A richiesta è possibile avere resa cromatica CRI 95 e colorazioni dei LED per speciali applicazioni.

Sempre a richiesta è possibile fornire l'apparecchio con protezione IP54.

Professional recessed downlight with painted die-cast aluminium frame ring.







Aluminium reflector with 99,9% pure aluminium bright finish. Anodized or black painted aluminium heat sink.

Available with innovative IOB LED or with COB LED.

The version with COB LED is proposed with color rendering CRI 85 also in dimmable version and supplied complete with separate power supply.

On request it is possible to have CRI 95 color rendering and LED colors for special applications.

Always on request it is possible to supply the downlight with IP54 protection.

CODE	LUMEN NOM					
	LED	W	3000°K	HOLE DIMENSIONI	DIMENSIONS A-B mm	WEIGHT
022AC20 	IOB 60°	20	2200	205	130X220	800 GR
022AC30 	IOB 60°	30	3300	205	130X220	800 GR
02218 	COB 60°	18	2800	205	130X220	800 GR
02225 	COB 60°	25	3770	205	130X220	800 GR
02240 	COB 60°	40	5420	205	130X220	800 GR
02250 	COB 60°	50	7050	205	130X220	1,0 KG

## ■ COLOR CODE

● 32 - frosted white

## ● LED COLOR CODE

3000°K- 85

3500°K- 85

4000°K- 85

INCASSI / RECESSED

geneX  
GENERAZIONI DI LUCE

# POLO 220

Faro ad incasso professionale, dal design minimale ad alte prestazioni illuminotecniche adatto per aree commerciali e uffici di dimensioni medio - grandi.

High performance professional recessed downlight with minimal design. Suitable for medium to large commercial areas and offices.