


SWIMCALY.2 LED




Wall recessed projector stainless steel AISI 316 underwater max 1,5 m. Complete with housing for concrete installation. Used in fountains or swimming pools with fresh or sea water. Resistant to galvanic currents. Stainless steel AISI 316 body. Polished stainless steel AISI 316 ring. Transparent tempered protective glass thickness 12 mm. Silicone gaskets. Brass cable gland IP68. Neoprene black wire H07RN-F 3G1,5 - 3 m. Stainless steel screws. Thermoplastic reinforced housing with brass screws. Control gear (not included).

Wall recessed projector stainless steel AISI 316 underwater max 1,5 m. Complete with housing for concrete installation. Used in fountains or swimming pools with fresh or sea water. Resistant to galvanic currents. Stainless steel AISI 316 body. Polished stainless steel AISI 316 ring. Transparent tempered protective glass thickness 12 mm. Silicone gaskets. Brass cable gland IP68. Neoprene black wire H07RN-F 3G1,5 - 3 m. Stainless steel screws. Thermoplastic reinforced housing with brass screws. Control gear (not included).



POWER SUPPLY
220/240V-50/60Hz or
12/24Vdc

ACCESSORI / ACCESSORIES

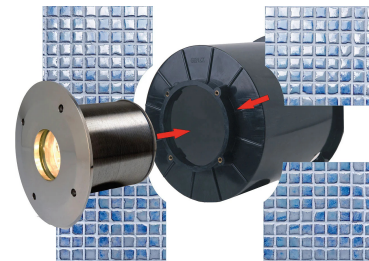

Applicazione

CODE	LUMEN NOM				
	LED	LAMP	W	3000°K	4000°K
SC5 [▲]	1	SMD	5	410	440
SCCL3WRGB [▲]	3	3X1X1	7		

• LED COLOR CODE

3000°K- 85
4000°K- 85
5000°K- 85

▲ REFLECTOR CODE

15° - REFLECTOR BEAM
24° - REFLECTOR BEAM
36° - REFLECTOR BEAM