


# QUADRO 160 LED



405 gr

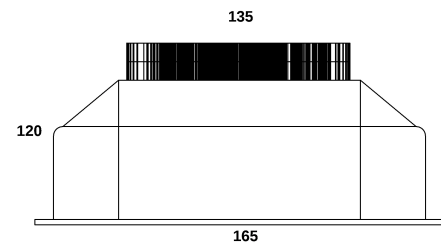

POWER SUPPLY  
220/240V-50/60Hz

Professional recessed downlight with use of COB LED. Aluminum reflector with pure aluminum 99.9% for maximum light recovery and control. Anodized or painted aluminum PCB cooling heatsink. Painted aluminum die-cast ring. The COB LED version is proposed with CRI 85 color rendering even in dimmable version 1-10V or DALI and supplied complete with separate power supply. On request you can have CRI 97 color rendering and LED coloration for special applications. Die cast aluminium with partial frosted glass included.

Professional recessed downlight with use of COB LED. Aluminum reflector with pure aluminum 99.9% for maximum light recovery and control. Anodized or painted aluminum PCB cooling heatsink. Painted aluminum die-cast ring. The COB LED version is proposed with CRI 85 color rendering even in dimmable version 1-10V or DALI and supplied complete with separate power supply. On request you can have CRI 97 color rendering and LED coloration for special applications. Die cast aluminium with partial frosted glass included.

CODE	LUMEN NOM					
	LED	LAMP	W	3000°K	4000°K	SOLE DIAM.
90025	1	COB 60°	25	3770	3900	135X135
90040	1	COB 60°	40	5420	5600	135X135
90050	1	COB 60°	50	7050	7300	

## COLOR CODE

- 10 - frosted alu
- 1 - chromed
- 5 - alumat
- 32 -
- 33 - frosted black

## LED COLOR CODE

- 3000°K- 85
- 4000°K- 85