

SKYLIGHT MONO




Apparecchio a sospensione in alluminio anodizzato spazzolato con schermo in Plexiglass®Satin Ice e modulo lineare LED completo di alimentazione e dissipazione integrata. Cavi d'acciaio lunghezza m 1,50. Disponibile anche nelle versioni con lenti lineari 60°, 90°, lenti asimmetriche con singola o doppia uscita luce per illuminazione di scaffalature lineari.


Brushed anodized aluminium suspension light with Plexiglass®Satin Ice screen and LED linear module complete with built-in power supply and heat sink. Steel wires 1,50 m length. Also available in versions with linear lens 60°, 90°, and mono or double asymmetrical lens for linear shelving lighting.

CODE	LUMEN NOM			
	LED	W	3000°K	4000°K
3332 ■ ● *	SMD	32	7200	7600
3365 ■ ● *	SMD	65	14400	15200

45



1180

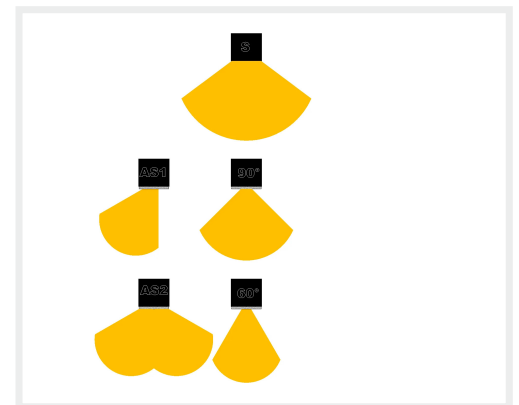

■ COLOR CODE

- 11 - brushed anodized
- 32 - frosted white
- 33 - frosted black

• LED COLOR CODE

- 3000°K- 85
- 4000°K- 85
- 5000°K- 85

* REFLECTOR CODE

- 60° Linear- lens beam angle
- 90° linear- lens beam angle
- S- symmetrical beam lens
- AS1- lens mono asym. beam angle
- AS2- lens double asym. beam angle