


# SWIMCALY.2 LED




Faro ad incasso parete in acciaio INOX AISI 316 completo di cassaforma per calcestruzzo, applicazione ad immersione max 1,5 m per utilizzo in vasche o piscine acqua dolce o salata. Resistente alle correnti galvaniche. Corpo faro in fusione di acciaio INOX AISI 316. Anello faro in fusione di acciaio INOX AISI 316 lucidato. Vetro di protezione trasparente temperato ad alto spessore 12mm. Guarnizioni in silicone. Pressacavo in ottone nichelato IP68. Cavo in dotazione Neoprene nero H07RN-F 3G1,5 - 3 m. Viteria in acciaio INOX. Cassaforma in materiale termoplastico rinforzato con inserti fissaggio faro in ottone. Alimentazione remota (da ordinare a parte).

Wall recessed projector stainless steel AISI 316 underwater max 1,5 m. Complete with housing for concrete installation. Used in fountains or swimming pools with fresh or sea water. Resistant to galvanic currents. Stainless steel AISI 316 body. Polished stainless steel AISI 316 ring. Transparent tempered protective glass thickness 12 mm. Silicone gaskets. Brass cable gland IP68. Neoprene black wire H07RN-F 3G1,5 - 3 m. Stainless steel screws. Thermoplastic reinforced housing with brass screws. Control gear (not included).



POWER SUPPLY  
220/240V-50/60Hz or  
12/24Vdc

## ACCESSORI / ACCESSORIES

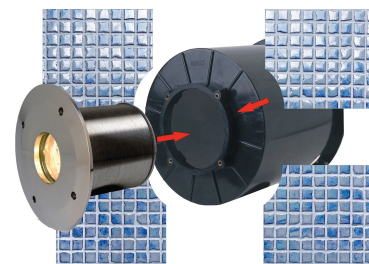

## Applicazione

CODE	LED	LAMP	W	LUMEN NOM	
				3000°K	4000°K
SC5 <sup>▲</sup>	1	SMD	5	410	440
SCCL3WRGB <sup>▲</sup>	3	3X1X1	7		

## • LED COLOR CODE

**3000°K**- 85  
**4000°K**- 85  
**5000°K**- 85

## ▲ REFLECTOR CODE

**15°** - REFLECTOR BEAM  
**24°** - REFLECTOR BEAM  
**36°** - REFLECTOR BEAM