


TWISTER 235 IP UGR21





1,3 KG 

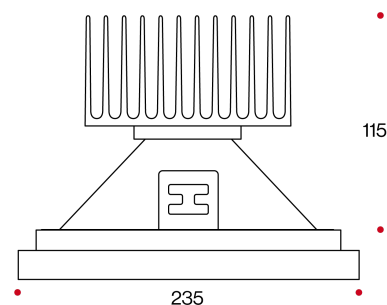





POWER SUPPLY
220/240V-50/60Hz

Doppio anello in alluminio pressofuso verniciato con polveri epossidiche ad alta resistenza alle nebbie saline previo trattamento di fosfocromatazione. Vetro di protezione temperato trasparente (standard). Guarnizioni in silicone. Riflettore UGR21 (antiriflesso) in policarbonato brillantato con puro alluminio 99,9%. Dissipatore in alluminio anodizzato. Alimentatore separato incluso.

Double die-cast aluminum ring painted with high resistance epoxy powders to saline mists after a specific washing process called "phospho-cromate". Transparent tempered glass (standard). Silicone gasket. UGR21 (Low glare) reflector in polycarbonate with 99,9% pure aluminium bright finishing. Anodized aluminum heat sink. Separate power supply included.

CODE	LED	W	LUMEN NOM		HOLE DIMENSIONI	HOLE DIAM.	DIMENSIONS A-B mm
			3000°K	4000°K			
5025IPUGR 	COB U21	25	3770	3900	238X115	210	238X115
5040IPUGR 	COB U21	40	5420	5600	238X115	210	238X115

COLOR CODE

-  10 - frosted alu
-  32 - frosted white
-  33 - frosted black
-  75 - corten

LED COLOR CODE

- 3000°K- 85
- 4000°K- 85