



QUADRO 200 LED

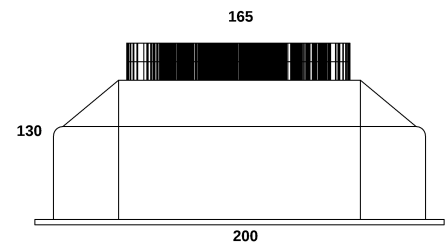

POWER SUPPLY
220/240V-50/60Hz

Faro ad incasso professionale con utilizzo di LED COB. Riflettore in alluminio brillantato con puro alluminio 99,9% per il massimo recupero e controllo della luce. Dissipatore di calore per raffreddamento del PCB in alluminio anodizzato. Anello telaio faro in pressofusione di alluminio verniciato. La versione con LED COB viene proposta con resa cromatica CRI 85 anche in versione dimmerabile 1-10V oppure DALI e fornita completa di alimentatore separato. A richiesta è possibile avere resa cromatica CRI 97 e colorazioni del LED per speciali applicazioni. Cornice di chiusura in alluminio pressofuso e vetro parzialmente satinato inclusi.

Professional recessed downlight with use of COB LED. Aluminum reflector with pure aluminum 99.9% for maximum light recovery and control. Anodized or painted aluminum PCB cooling heatsink. Painted aluminum die-cast ring. The COB LED version is proposed with CRI 85 color rendering even in dimmable version 1-10V or DALI and supplied complete with separate power supply. On request you can have CRI 97 color rendering and LED coloration for special applications. Die cast aluminium with partial frosted glass included.

CODE	LUMEN NOM					
	LED	LAMP	W	3000°K	4000°K	HOLE DIAM.
91025	1	COB 60°	25	3770	3900	165X165mm
91040	1	COB 60°	40	5420	5600	165X165mm
91050	1	COB 60°	50	7050	7300	165X165mm

COLOR CODE

- 1 - chromed
- 5 - alumat
- 6 - gold plated
- 10 - frosted alu
- 32 - frosted white
- 33 - frosted black

LED COLOR CODE

3000°K- 85

4000°K- 85