


# POLO OR.



700 GR

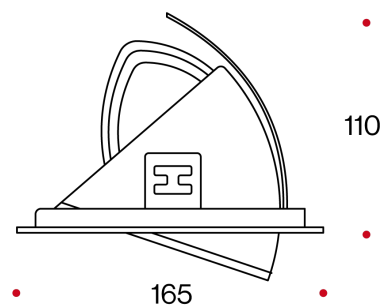

POWER SUPPLY  
220/240V-50/60Hz

Professional adjustable recessed downlight. Horizontal rotation 356°, vertical movement 60°. Reflector with pure aluminum 99.9% bright finish for maximum light recovery and control. Painted aluminium body. Anodized or black painted aluminium heatsink.

The COB LED version is proposed with CRI 85 color rendering also in dimmable version and supplied complete with separate power supply. On request it is possible to have CRI 95 color rendering and LED colors for special applications.

Professional adjustable recessed downlight. Horizontal rotation 356°, vertical movement 60°. Reflector with pure aluminum 99.9% bright finish for maximum light recovery and control. Painted aluminium body. Anodized or black painted aluminium heatsink.

The COB LED version is proposed with CRI 85 color rendering also in dimmable version and supplied complete with separate power supply. On request it is possible to have CRI 95 color rendering and LED colors for special applications.

CODE	LUMEN NOM				
	LED	W	3000°K	4000°K	SOLE DIAM.
017OR18	COB	18	2800	2920	145
017OR25	COB	25	3770	3900	145
017OR30	COB	30	4530	4610	145

## ■ COLOR CODE

● 33 - frosted black

## • LED COLOR CODE

3000°K- 85

4000°K- 85

## ▲ REFLECTOR CODE

15° - REFLECTOR BEAM

24° - REFLECTOR BEAM

36° - REFLECTOR BEAM