



POLO 220

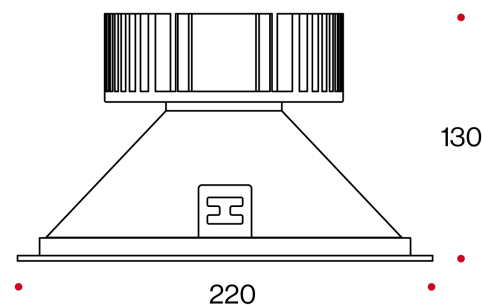

0,8 - 1KG 



POWER SUPPLY
220/240V-50/60Hz

Professional recessed downlight with painted die-cast aluminium frame ring.

Aluminium reflector with 99,9% pure aluminium bright finish. Anodized or black painted aluminium heat sink.

Available with innovative IOB LED or with COB LED.

The version with COB LED is proposed with color rendering CRI 85 also in dimmable version and supplied complete with separate power supply.

On request it is possible to have CRI 95 color rendering and LED colors for special applications.

Always on request it is possible to supply the downlight with IP54 protection.

Professional recessed downlight with painted die-cast aluminium frame ring.

Aluminium reflector with 99,9% pure aluminium bright finish. Anodized or black painted aluminium heat sink.

Available with innovative IOB LED or with COB LED.

The version with COB LED is proposed with color rendering CRI 85 also in dimmable version and supplied complete with separate power supply.

On request it is possible to have CRI 95 color rendering and LED colors for special applications.

Always on request it is possible to supply the downlight with IP54 protection.

CODE	LUMEN NOM			HOLE DIMENSIONI	HOLE DIAM.	DIMENSIONS A-B mm
	LED	W	3000°K 4000°K			
022AC20	IOB 60°	20	2200 2400	130X220	205	130X220
022AC30	IOB 60°	30	3300 3600	130X220	205	130X220
02218	COB 60°	18	2800 2920	130X220	205	130X220
02225	COB 60°	25	3770 3900	130X220	205	130X220
02240	COB 60°	40	5420 5600	130X220	205	130X220
02250	COB 60°	50	7050 7300	130X220	205	130X220

COLOR CODE

● 32 -

LED COLOR CODE

3000°K- 85

3500°K- 85

4000°K- 85