



TWISTER 165 IP



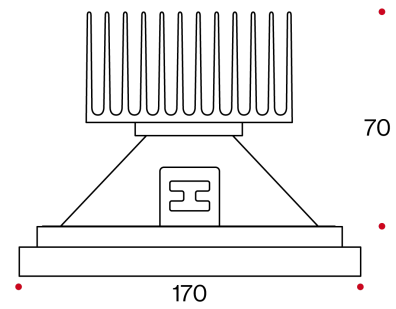

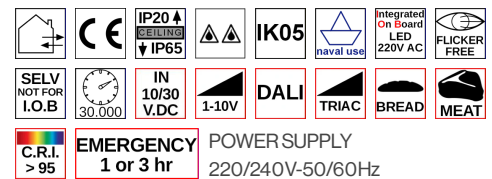


1,1 KG 







Double die-cast aluminium ring epoxy powder painting resistant to saline mists. Tempered clear protective glass (standard). Silicone gaskets Aluminium reflector with 99,9% pure aluminium bright finishing. Anodized aluminium heat sink.

Double die-cast aluminium ring epoxy powder painting resistant to saline mists. Tempered clear protective glass (standard). Silicone gaskets Aluminium reflector with 99,9% pure aluminium bright finishing. Anodized aluminium heat sink.

CODE	LED	W	LUMEN NOM		HOLE DIMENSIONI	HOLE DIAM.	DIMENSIONS A-B mm
			3000°K	4000°K			
6015ACIP 	IOB 40°	15	1650	1800			
6020ACIP 	IOB 40°	20	2200	2400	170X70	148	170X70
6030ACIP 	IOB 40°	30	3300	3600	170X70	148	170X70
6025IP 	COB 40°	25	3770	3900	170X70	148	170X70
6040IP 	COB 40°	40	5420	5600	170X70	148	170X70

COLOR CODE

-  10 - frosted alu
-  32 -
-  33 - frosted black
-  75 - corten

LED COLOR CODE

- 3000°K- 85
- 4000°K- 85