

15




Anello in alluminio pressofuso.
Adatto per lampade 12V oppure 220/240V GU10,
con portalamпада in porcellana oppure moduli
LED TCAC, CL3W-RGB.

Moduli LED vedi pagina 153.

Die- cast aluminium ring.
Suitable for lamps 12V or 220/240V GU10, with
porcelain lampholder or LED modules TCAC,
CL3W-RGB.

LED modules see pages 153.

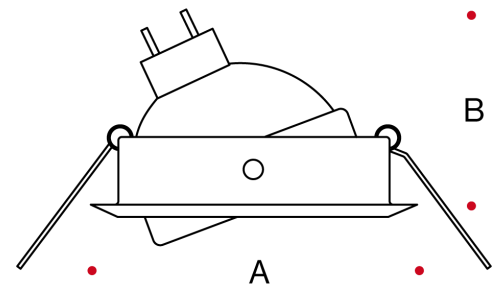

99-143 GR 



ACCESSORI / ACCESSORIES





A65

Anello alluminio per incasso soffitto in muratura.
Aluminium ring for concrete installation.










A75

Anello alluminio per incasso soffitto in muratura.
Aluminium ring for concrete installation.

CODE	LAMP	LUMEN NOM		
		HOLE DIMENSIONI	DIMENSIONS A-B mm	WEIGHT
15 	GU5,3, GU10, TCAC, CL3W-RGB	75	82X70	143 GR
25 	G4, GU10	56	65X52	99 GR

COLOR CODE

-  1 - chromed
-  5 - alumat
-  6 - gold plated
-  8 - bronze
-  9 - gold mat
-  32 - frosted white
-  33 - frosted black

15

Faretto ad incasso orientabile.

Adjustable recessed spotlight.