



# POLO 165

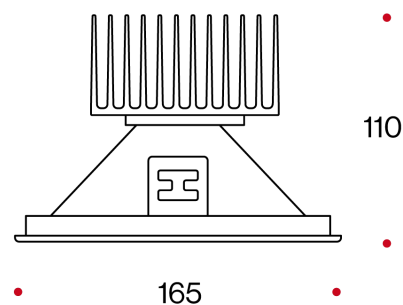

200 GR 



POWER SUPPLY  
220/240V-50/60Hz

Professional recessed downlight with painted die-cast aluminium frame ring.

Aluminium reflector with 99,9% pure aluminium bright finish. Anodized or black painted aluminium heat sink.

Available with the innovative IOB LED or with COB LED. The version with COB LED is proposed with color rendering CRI 85 also in dimmable version and supplied complete with separate power supply.







On request it is possible to have CRI 95 color rendering and LED colors for special applications. Always on request it is possible to supply the downlight with IP54 protection.

Professional recessed downlight with painted die-cast aluminium frame ring.

Aluminium reflector with 99,9% pure aluminium bright finish. Anodized or black painted aluminium heat sink.

Available with the innovative IOB LED or with COB LED. The version with COB LED is proposed with color rendering CRI 85 also in dimmable version and supplied complete with separate power supply.

On request it is possible to have CRI 95 color rendering and LED colors for special applications. Always on request it is possible to supply the downlight with IP54 protection.

CODE	LUMEN NOM				HOLE DIMENSIONI	HOLE DIAM.	DIMENSIONS A-B mm
	LED	W	3000°K	4000°K			
017AC15 	IOB 60°	15	1650	1800	110X165	150	110X165
017AC20 	IOB 60°	20	2200	2400	110X165	150	110X165
017AC30 	IOB 60°	30	3300	3600	110X165	150	110X165
01718 	COB 60°	18	2800	2920	110X165	150	110X165
01725 	COB 60°	25	3770	3900	110X165	150	110X165
01740 	COB 60°	40	5420	5600	110X165	150	110X165

## COLOR CODE

 32 - frosted white

## LED COLOR CODE

3000°K- 85

3500°K- 85

4000°K- 85